



The high-performance Faze LITE 108 features the latest in LED technology with high lumen per watt efficacy and visually dynamic illumination.

FEATURES

- + Precision reflector with clear lens - for better light distribution
- + Specially designed heat sink - for class leading heat dissipation
- + IP 44 - Suitable for wet areas
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver 13W (71-CAS350)



GENERAL SPECIFICATIONS

LED	12W
Lumens	1060 lm (3000K) 1130 lm (4000K)
Efficacy	84 lm/w (3000K) 91 lm/w (4000K)
Colour Temperature	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White
Material	Powder Coated Aluminium
Finish	White Black
Beam	36° 60°
CRI	92+
IP	44
Colour Deviation	SDCM ≤2
UGR	<23
Lifetime	>55,000hrs L80 B10
Warranty	5 Years

Please Note: When using C-Bus, use universal or trailing edge dimming modules

PROJECT DETAILS


PROJECT:

TYPE:

NOTES:

DIMENSIONS (mm)

i Cut Out
Ø92mm

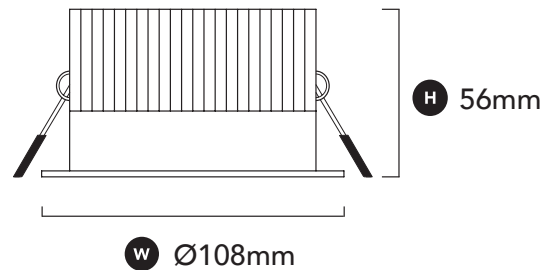

DRIVER SPECIFICATIONS

L 104 x W 43 x H 24 mm

Power	300mA 240V Remote Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90

DALI dimming available upon request

PRODUCT CODES

White, 3000K, 60°	118-LI2L12W603
White, 4000K, 60°	118-LI2L12W604
Black, 3000K, 60°	118-LI2L12B603
Black, 4000K, 60°	118-LI2L12B604

REFLECTOR CODE

36° Reflector	118-RFLL36
---------------	-------------------