



The high-performance Faze LITE 125 features the latest in LED technology with high lumen per watt efficacy and visually dynamic illumination; ideal for large-scale commercial projects that require higher powered fittings.

## FEATURES

- + Precision reactor with clear lens - for better light distribution and performance
- + Specially designed heat sink - for class leading heat dissipation
- + IP 44 - Suitable for wet areas
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer 71-CASCBU) with Casambi BasicDim Driver 13W 71-CAS350)



## GENERAL SPECIFICATIONS

<b>LED</b>	25W
<b>Lumens</b>	2000 lm (3000K)   2100 lm (4000K)
<b>Efficacy</b>	78 lm/w (3000K)   81 lm/w (4000K)
<b>Colour</b>	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White
<b>Material</b>	Powder Coated Aluminium
<b>Finish</b>	White   Black
<b>Beam</b>	36°   60°
<b>CRI</b>	92+
<b>IP</b>	44
<b>Colour Deviation</b>	SDCM ≤2
<b>UGR</b>	<21
<b>Lifetime</b>	>55,000hrs L80 B10
<b>Warranty</b>	5 Years

## PROJECT DETAILS

PROJECT:


TYPE:

NOTES:

## DIMENSIONS (mm)

**i** Cut Out

Ø108mm

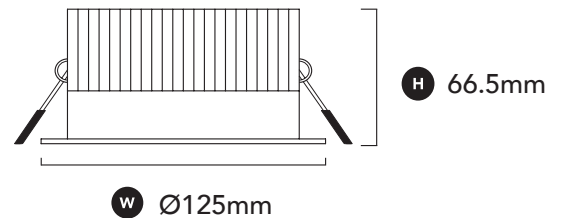

**w** Ø125mm

## DRIVER SPECIFICATIONS

L 104 x W 43 x H 24 mm

**Power** 600mA 240V Remote Dimmable Driver

**Dimming** Phase Cut Dimming

**Power Factor** > 0.90

*DALI dimming available upon request*

## PRODUCT CODES

White, 3000K, 60° **118-LI2W25W603**

White, 4000K, 60° **118-LI2W25W604**

Black, 3000K, 60° **118-LI2W25B603**

Black, 4000K, 60° **118-LI2W25B604**

## REFLECTOR CODE

36° Reflector

**118-RFLXL36**

**Please Note:** When using C-Bus, use universal or trailing edge dimming modules