PRO ROUND

The new generation Faze PRO downlight is specifically designed to enhance. Utilizing superior LED technology and with the highest CRI, these recessed ceiling lights are guaranteed to bring your spaces to life.

PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

FEATURES

+ Precision reflector with clear lens - for better light distribution.
+ Specially designed heat sink - for class leading heat dissipation.
+ IC-4 rated
+ Black baffle design - eliminates glare for optimum visual comfort
+ Suitable for concrete install with concrete canister (ordered separately)
+ IP44 and suitable for wet areas.
+ Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU) & with Casambi BasicDim Driver 13W (71-CAS350)

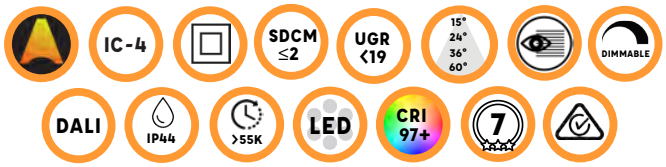

DIMENSIONS (mm)

Cut Out Ø92mm



GENERAL SPECIFICATIONS

LED	13W *operating wattage 14.8W
Lumens	1015 lm (3000K) I 1215 (4000K)
Efficacy	66 lm/w (3000K) I 78 lm/w (4000K)
Colour Temperature	☐ 3000K, Warm White ☐ 4000K, Cool White
Material	Powder Coated Aluminium
Finish	White I Black
Beam	15° I 24° I 36° I 60°
CRI	97+
IP	44
Colour Deviation	SDCM ≤2
UGR	<19
Lifetime	>55,000hrs L80 B10
Warranty	7 Years

Please Note: *When using C-Bus, use universal or trailing edge dimming modules*

DRIVER SPECIFICATIONS

L 107 x W 43 x H 25 mm

Power	350mA 240V Remote, Flicker Free Dimmable Driver
Dimming	Phase Cut Dimming
Power Factor	> 0.90

DALI dimming available upon request

PRODUCT CODES

White, 3000K, 60°	**118-PR7LR13W603**
White, 4000K, 60°	**118-PR7LR13W604**
Black, 3000K, 60°	**118-PR7LR13B603**
Black, 4000K, 60°	**118-PR7LR13B604**

REFLECTOR CODES

15° Reflector	**118-RFLP15**
24° Reflector	**118-RFLP24**
36° Reflector	**118-RFLP36**