

PROJECT:

TYPE:

NOTES:




## FEATURES

- + Specially designed heat sink - for class leading heat dissipation
- + IC-4 rated
- + IP44 and suitable for wet areas
- + High quality diffuser for increased lumen output
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)



## DIMENSIONS (mm)

Cut Out  
Ø92mm

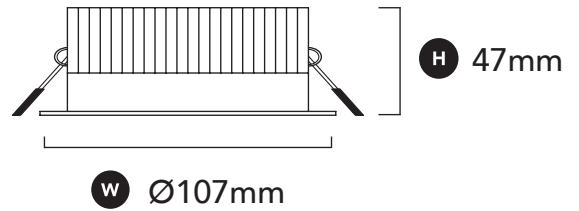

## GENERAL SPECIFICATIONS

<b>LED</b>	12W
<b>Lumens</b>	1040 lm (3000K)   1070 lm (4000K)
<b>Efficacy</b>	87 lm/w (3000K)   88 lm/w (4000K)
<b>Colour Temperature</b>	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White
<b>Material</b>	Powder Coated Aluminium
<b>Finish</b>	White   Black   Silver
<b>Beam</b>	90°
<b>CRI</b>	92+
<b>IP</b>	44
<b>Colour Deviation</b>	SDCM ≤3
<b>UGR</b>	<27
<b>Lifetime</b>	>55,000hrs L80 B10
<b>Warranty</b>	5 Years

## DRIVER SPECIFICATIONS

<b>L 104 x W 43 x H 24 mm</b>	
<b>Power</b>	300mA 240V Remote Dimmable Driver
<b>Dimming</b>	Phase Cut Dimming
<b>Power Factor</b>	> 0.95
<i><b>DALI dimming available upon request</b></i>	

## PRODUCT CODES

White, 3000K	<b>118-DS5L12W903</b>
White, 4000K	<b>118-DS5L12W904</b>
Black, 3000K	<b>118-DS5L12B903</b>
Black, 4000K	<b>118-DS5L12B904</b>
Silver, 3000K	<b>118-DS5L12S903</b>
Silver, 4000K	<b>118-DS5L12S904</b>

*Please Note: When using C-Bus, use universal or trailing edge dimming modules*