



The LINE OPAL is as practical as it is stylish, it can be surface mounted or suspended; providing flexibility across both residential and commercial projects. If the four different lengths are not enough, you can connect them together and create your own.

FEATURES

- + Surface mounted or suspended options
- + Specially designed ceiling canopy for fast installation and seamless design
- + Quick and easy connection system
- + Surface Mount option has 3mm detail from ceiling once installed
- + 1-10V dimming & non-dimming versions available upon request (minimum order quantity applies)
- + Compatible with remote Casambi CBU-TED Bluetooth Controllable Dimmer (71-CASCBU)



GENERAL SPECIFICATIONS

LED	15W 30W 45W 60W
Lumens	1200 lm 2300 lm 3900 lm 4600 lm (3000K) 1230 lm 2424 lm 3955 lm 4850 lm (4000K)
Efficacy	80 lm/w 76 lm/w 86 lm/w 76 lm/w (3000K) 82 lm/w 81 lm/w 88 lm/w 81 lm/w (3000K)
Colour Temperature	<input type="checkbox"/> 3000K, Warm White <input type="checkbox"/> 4000K, Cool White
Material	Powder Coated Aluminium
Finish	White Black
Beam	90°
CRI	90+
IP	40
Colour Deviation	SDCM ≤3
UGR	<21
Lifetime	>60,000hrs L80 B10
Warranty	5 Years

ACCESSORY CODES

Connection Kit	7-LI41CONNECT
Surface Mount Clip	7-LI41CLIP
4m Suspension Kit	7-LI414SUSB (Black) 7-LI414SUSW (White)


PROJECT DETAILS

PROJECT:

TYPE:

NOTES:

DIMENSIONS (mm)

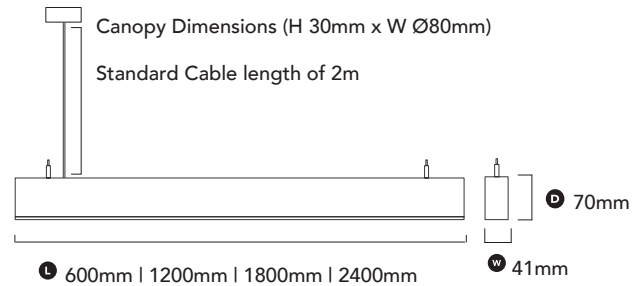

*Please note the Power cable length for the 2400mm (60W) version is 1650mm

DRIVER SPECIFICATIONS

240V Built-In Flicker Free Driver

15W 300mA | 30W 630mA
45W 930mA | 60W 1260mA

Dimming	Phase Cut Dimming
Power Factor	> 0.90

PRODUCT CODES

600mm, 15W, White, 3000K	7-LI410615W903
600mm, 15W, White, 4000K	7-LI410615W904
600mm, 15W, Black, 3000K	7-LI410615B903
600mm, 15W, Black, 4000K	7-LI410615B904
1200mm, 30W, White, 3000K	7-LI411230W903
1200mm, 30W, White, 4000K	7-LI411230W904
1200mm, 30W, Black, 3000K	7-LI411230B903
1200mm, 30W, Black, 4000K	7-LI411230B904
1800mm, 45W, White, 3000K	7-LI411845W903
1800mm, 45W, White, 4000K	7-LI411845W904
1800mm, 45W, Black, 3000K	7-LI411845B903
1800mm, 45W, Black, 4000K	7-LI411845B904
2400mm, 60W, White, 3000K	7-LI412460W903
2400mm, 60W, White, 4000K	7-LI412460W904
2400mm, 60W, Black, 3000K	7-LI412460B903
2400mm, 60W, Black, 4000K	7-LI412460B904