manooi
FJORD

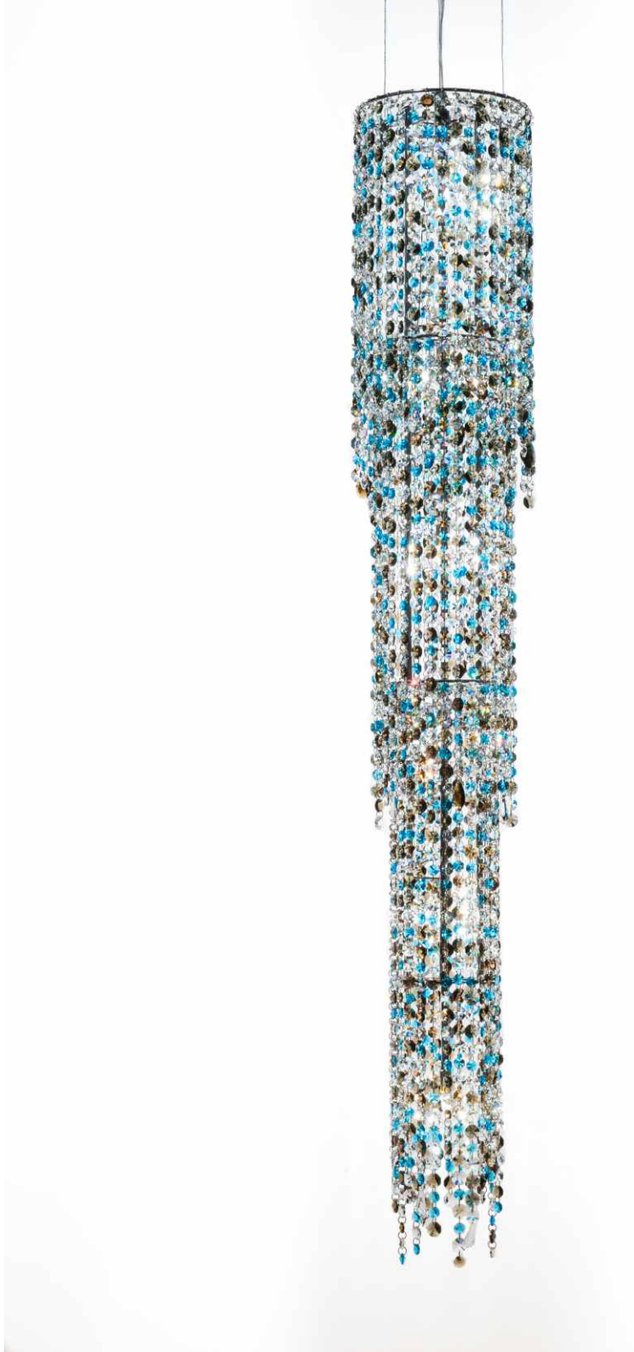

manooi Fjord

manooi Fjord

manooi Fjord

manooi Fjord

manooi
Fjord

manooi Fjord

manooi Fjord

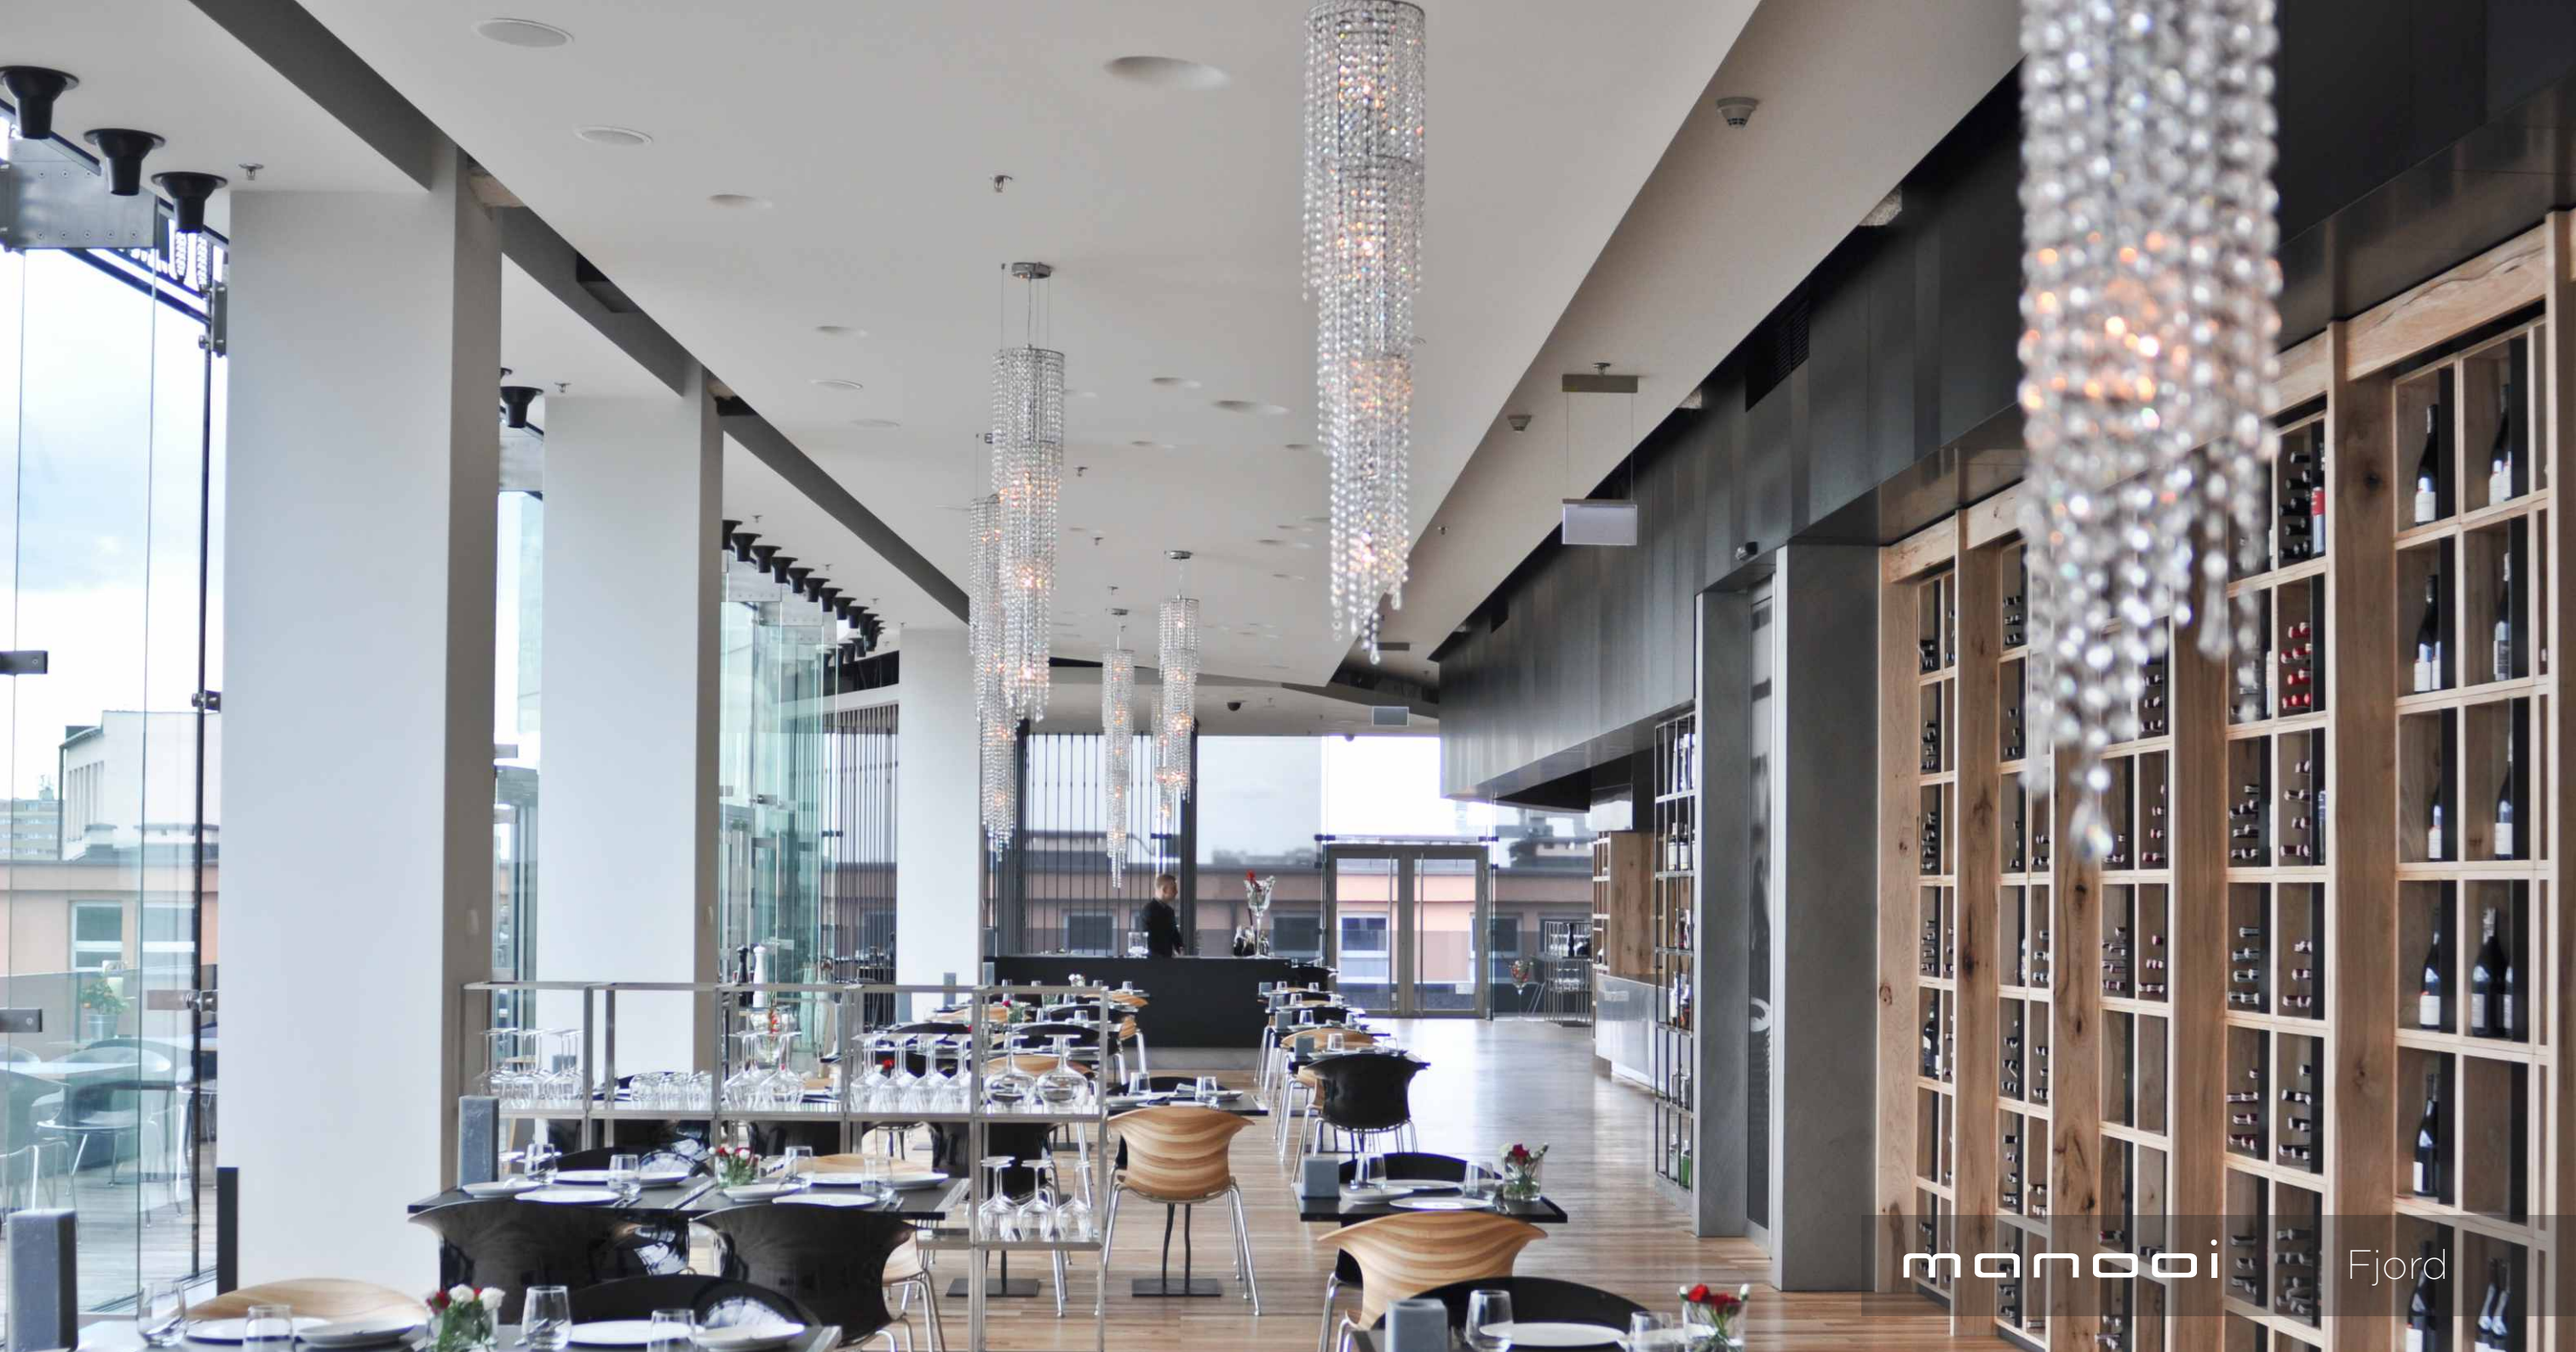

manooi Fjord

manooi Fjord

manooi Fjord

manooi Fjord

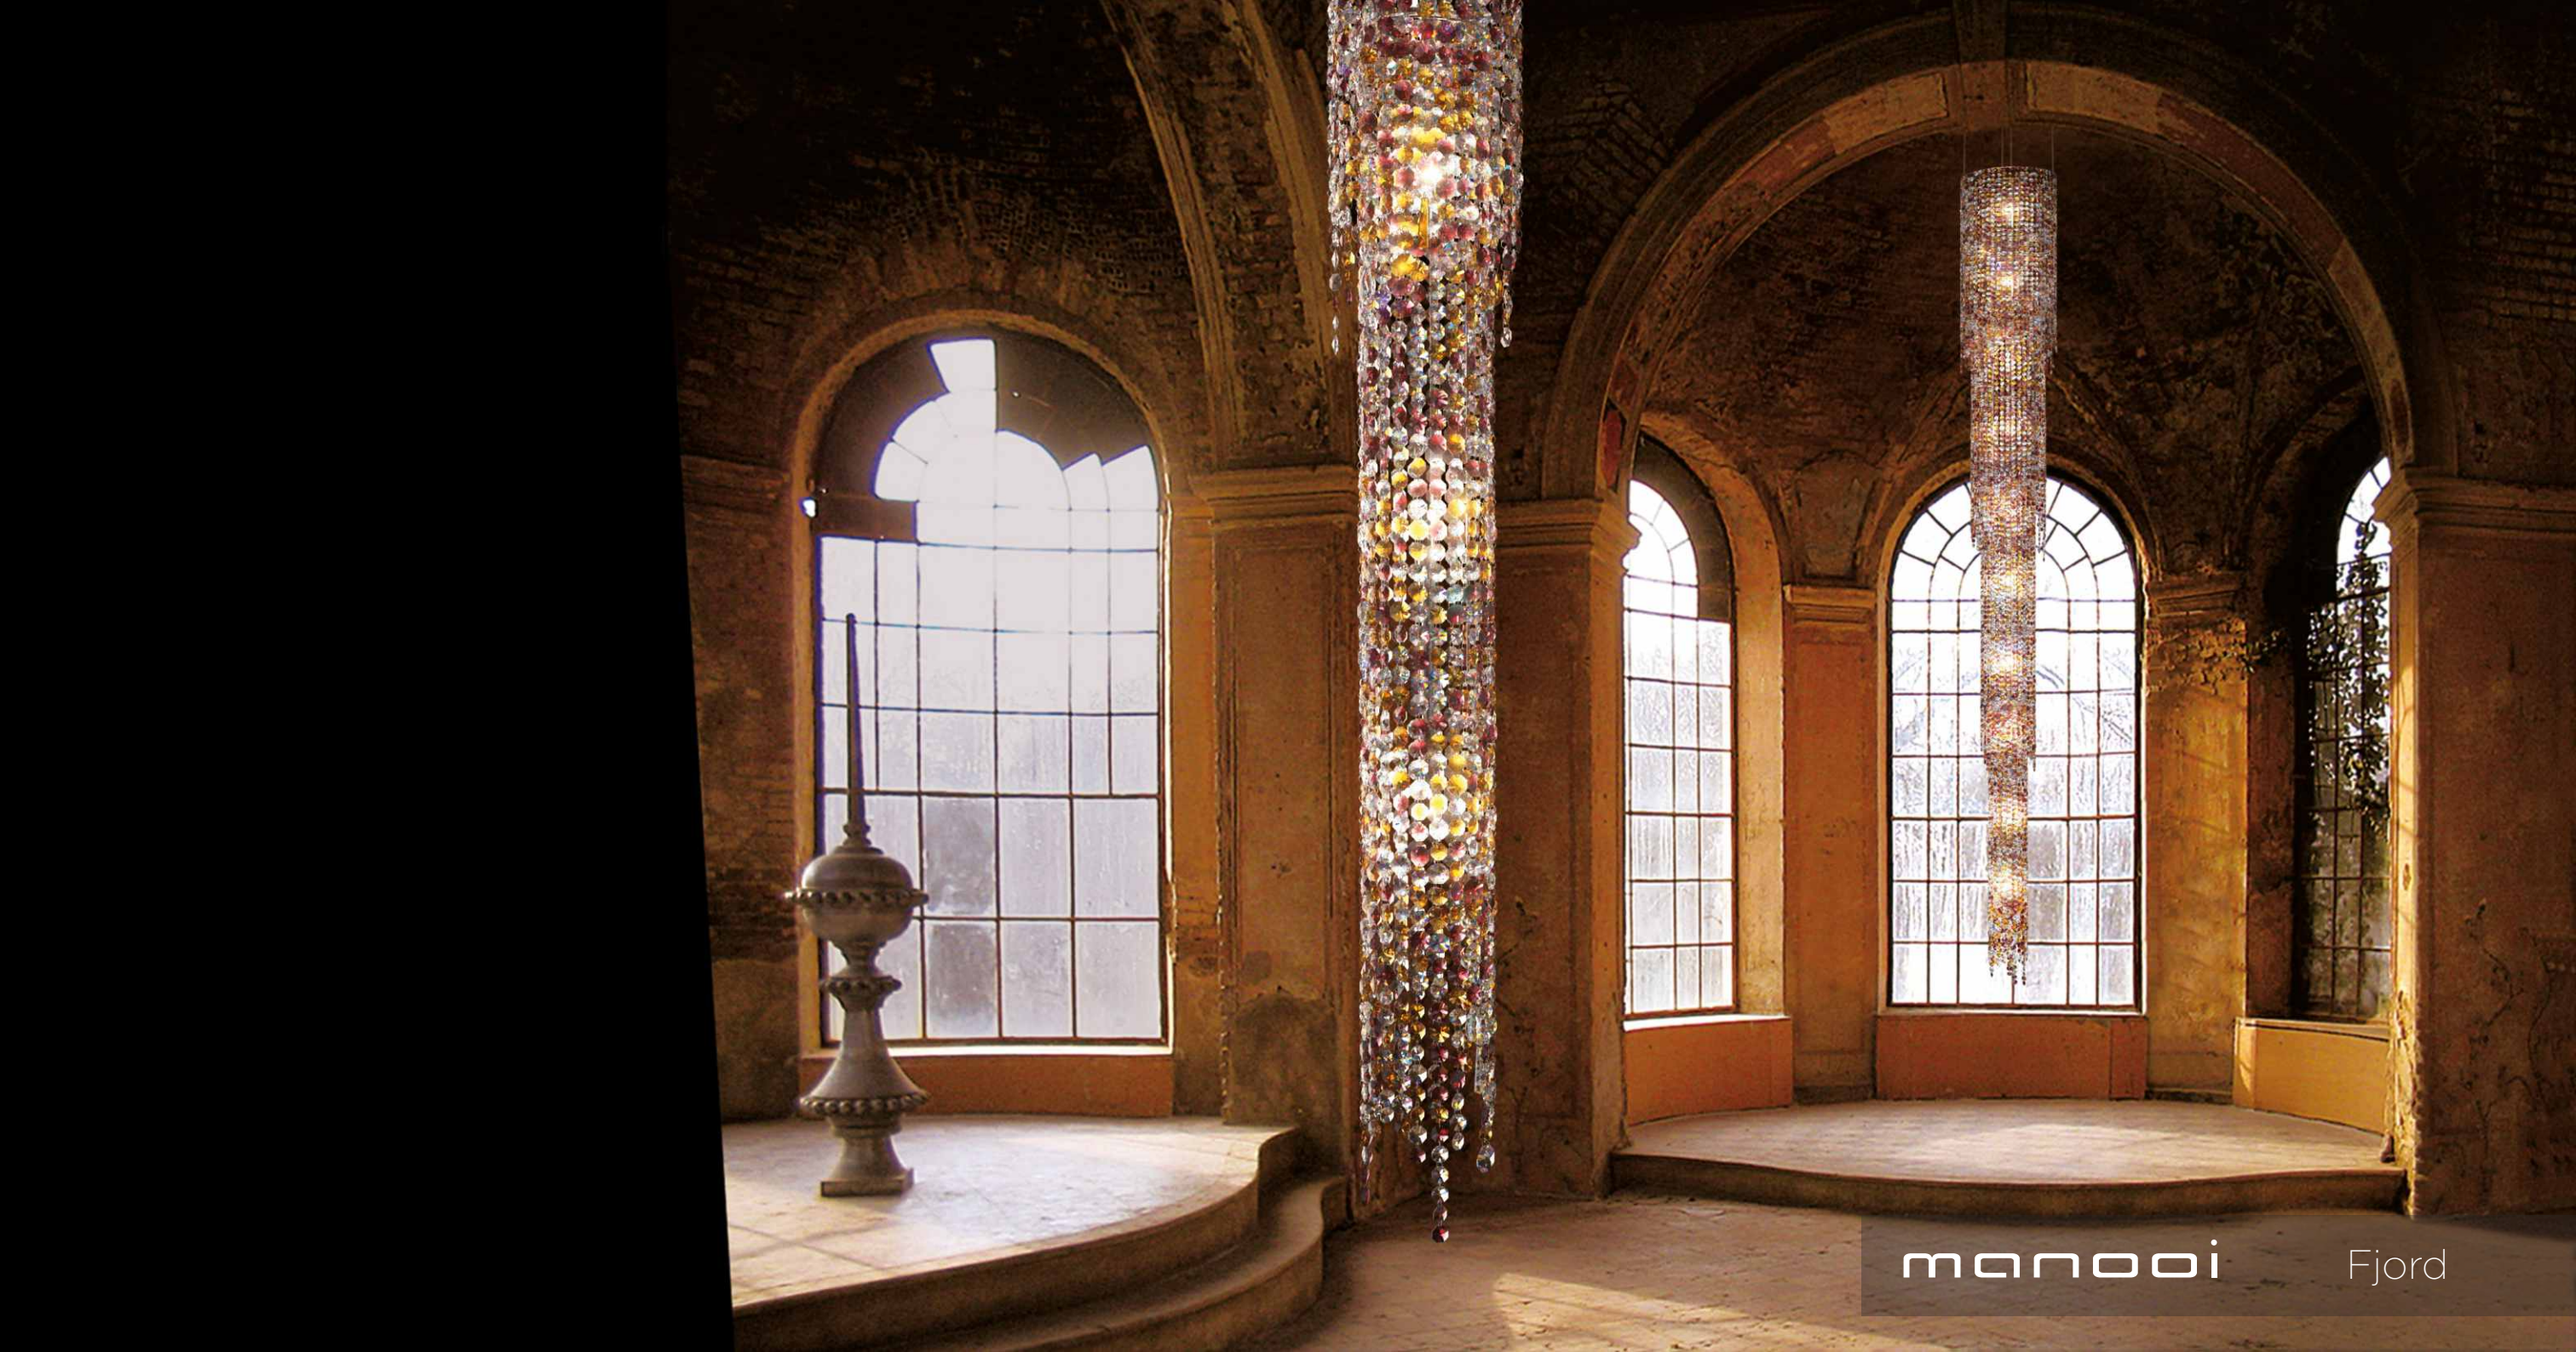
manooi
Fjord

manooi
Fjord

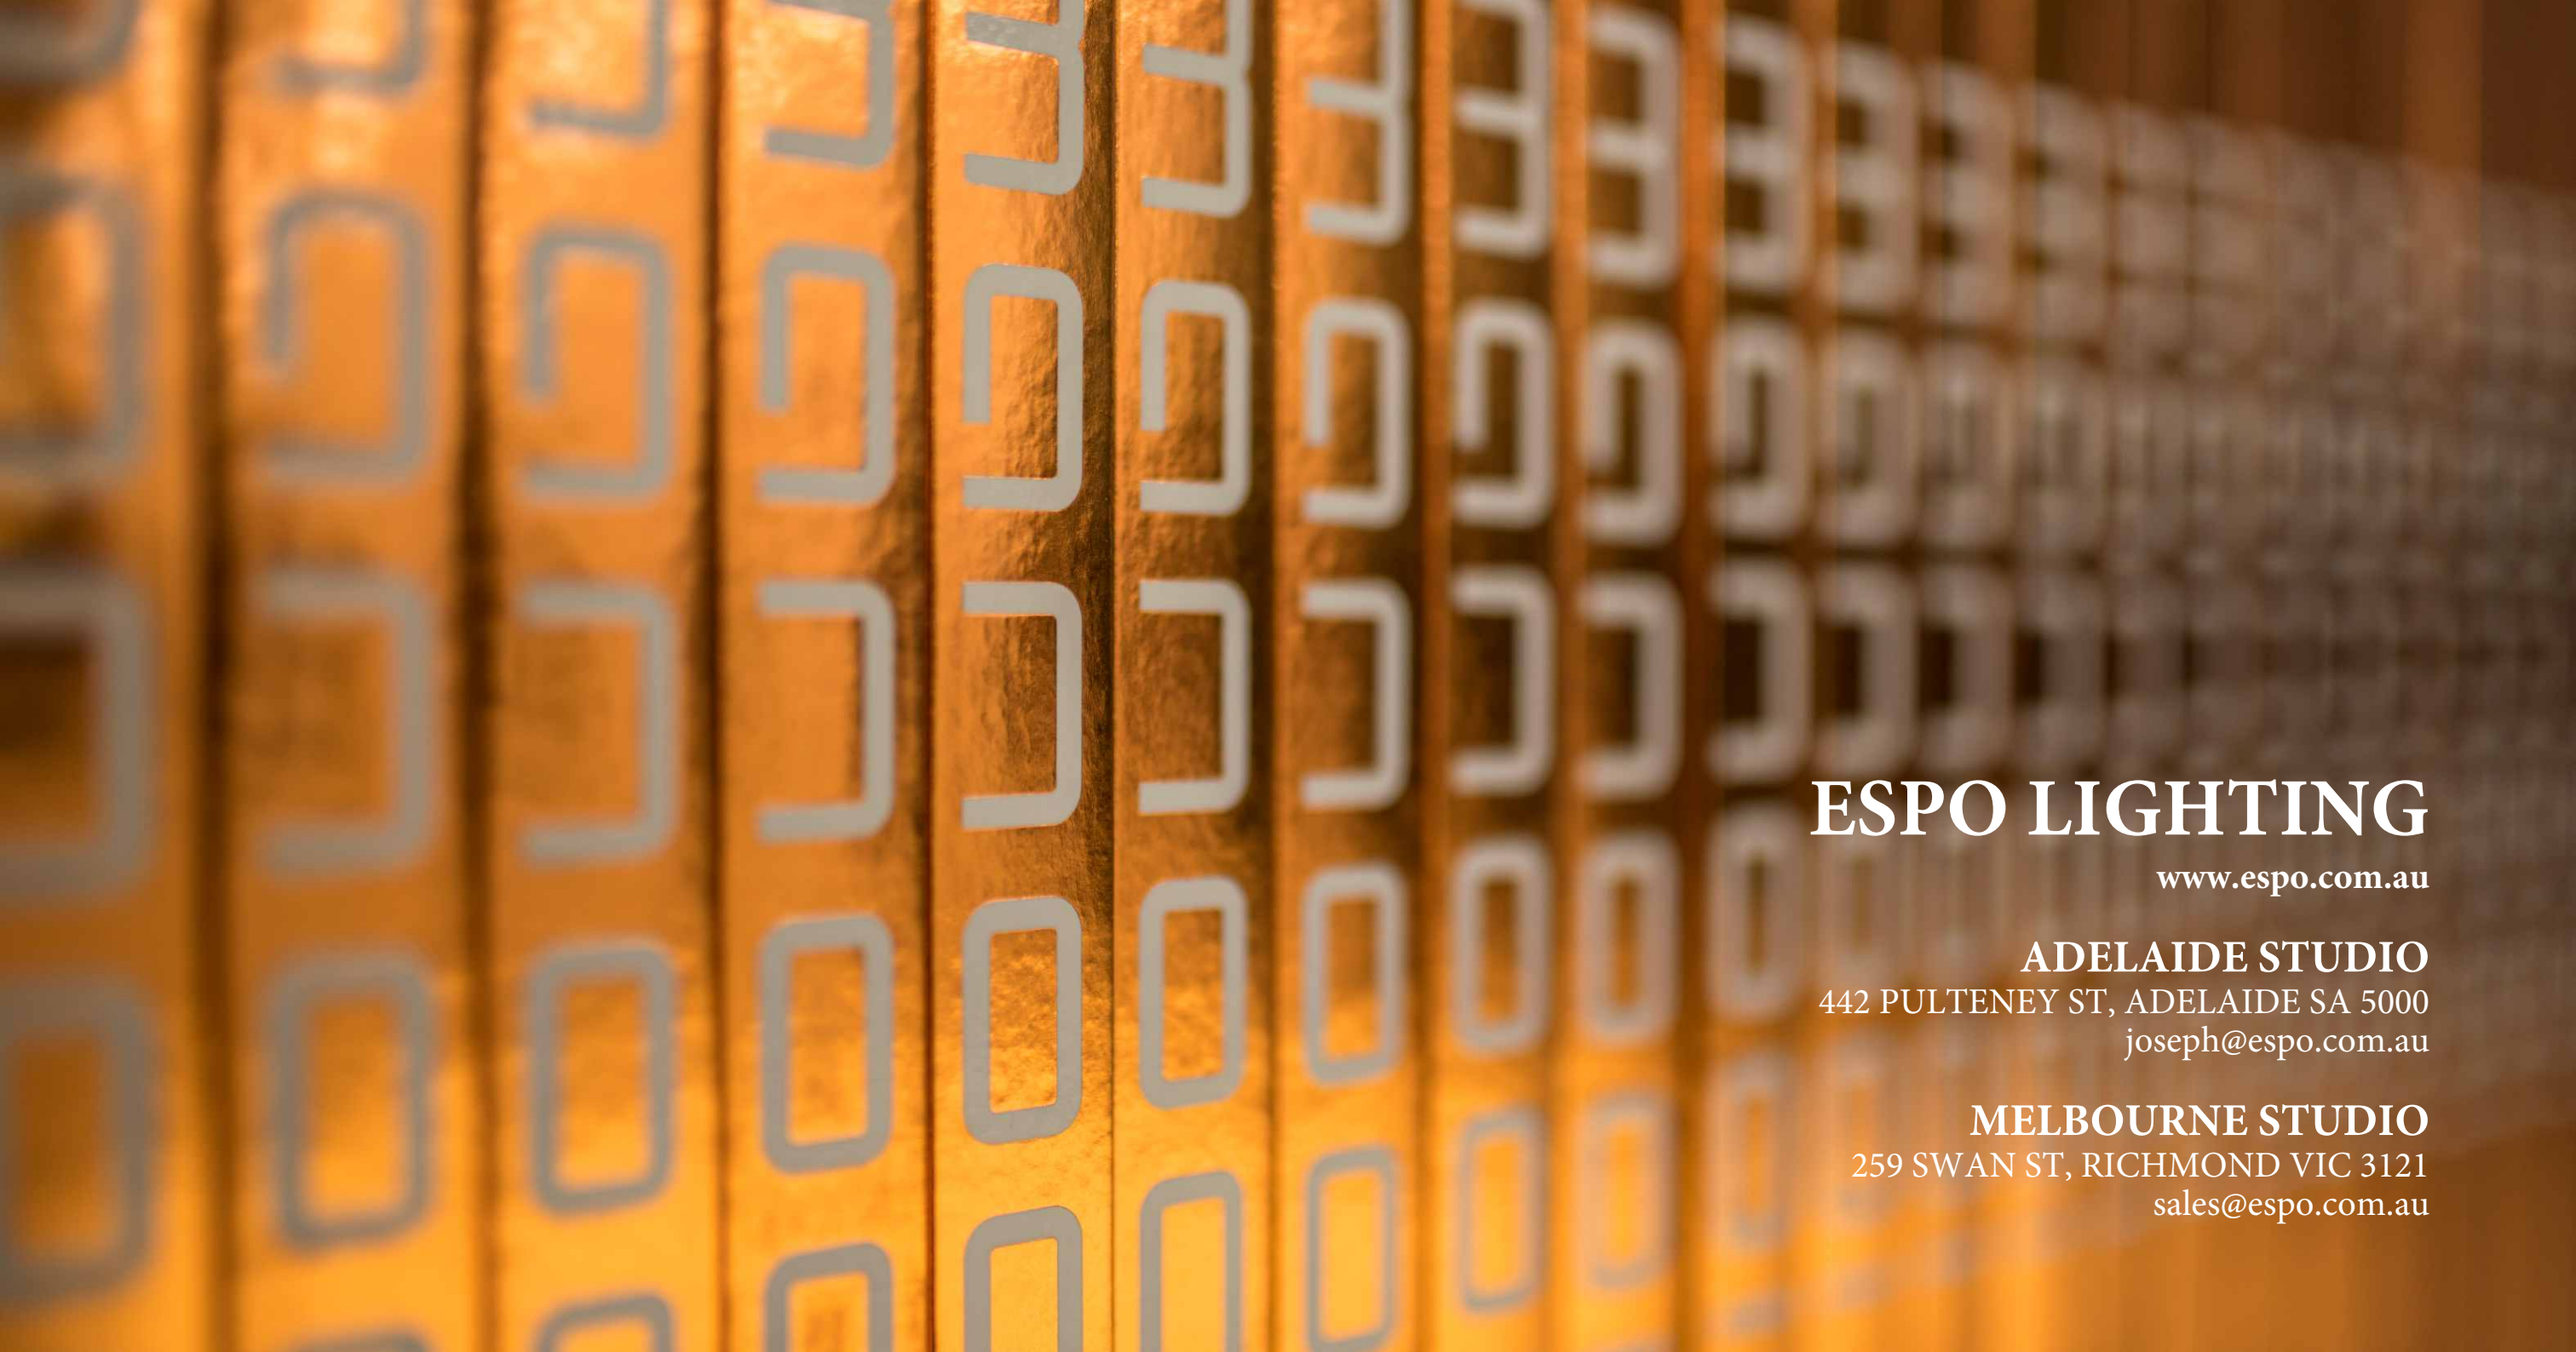

ESPO LIGHTING

www.espo.com.au

ADELAIDE STUDIO
442 PULTENEY ST, ADELAIDE SA 5000
joseph@espo.com.au

MELBOURNE STUDIO
259 SWAN ST, RICHMOND VIC 3121
sales@espo.com.au

L	Length
W	Width
H	Height
Ø	Diameter
+	Chandeliers with + sign: the top of the chandelier is also covered with crystal chains
~240V	240 V
CE	Product conforms to European Community Directive
PG	Product conforms to GOST R
	Fixable to ceiling
	Fixable to wall
	Table lamp
	E14 Light bulb
G9	G9 Halogen
G4	G4 Halogen
LED	LED
	Only basic insulation, accesible conductors are earthed. Earthing: compulsory.
F	Lights are fixable to fiery surface directly

COLLECTION: Crystalight

Type: suspended chandelier
Structure: polished stainless steel
Trimmings: full-cut crystal octagons and pendants in various sizes and forms
Pinnings: nickel plated rings
Suspension: galvanized bowden - Ø 1,5 mm
Bulb: max 60 W - G9 halogen
Cable: transparent PVC+PVC - 250 cm
Ceiling Rose: polished chrome-plated steel

MODEL	DIMENSIONS cm				PACKAGE cm			
	L	W	H	kg	L	W	H	Σ kg
Fjord 100/22 Ø	22	22	100	8	95	37	39	19
Fjord 120/22 Ø	22	22	120	9	115	37	39	21
Fjord 140/22 Ø	22	22	140	10	135	37	39	24
Fjord 160/22 Ø	22	22	160	11	155	37	39	27
Fjord 180/22 Ø	22	22	180	14	175	37	39	31
Fjord 210/30 Ø	30	30	210	18	205	45	47	40
Fjord 240/32 Ø	32	32	240	22	235	47	49	47

IF NOT MARKED OTHERWISE:
safety classification IP20 for all fittings
units in cm, kg,
all products supplied with voltage 240V upon request
illustrations and descriptions for informative purposes only

L	Length
W	Width
H	Height
Ø	Diameter
+	Chandeliers with + sign: the top of the chandelier is also covered with crystal chains
~240V	240 V
CE	Product conforms to European Community Directive
PG	Product conforms to GOST R
	Fixable to ceiling
	Fixable to wall
	Table lamp
	E14 Light bulb
G9	G9 Halogen
G4	G4 Halogen
LED	LED
	Only basic insulation, accesible conductors are earthed. Earthing: compulsory.
F	Lights are fixable to fiery surface directly

COLLECTION: Crystalight

Type: suspended chandelier
Structure: polished stainless steel
Trimmings: full-cut crystal octagons and pendants in various sizes and forms
Pinnings: nickel plated rings
Suspension: galvanized bowden - Ø 1,5 mm
Bulb: max 60 W - G9 halogen
Cable: transparent PVC+PVC - 250 cm
Ceiling Rose: polished chrome-plated steel

MODEL	DIMENSIONS cm				PACKAGE cm			
	L	W	H	kg	L	W	H	Σ kg
Fjord 270/32 Ø	32	32	270	26	265	47	49	54
Fjord 300/32 Ø	32	32	300	30	165	48	49	60
Fjord 330/32 Ø	32	32	330	33	180	48	49	67
Fjord 360/40 Ø	40	40	360	36	195	60	55	76
Fjord 400/40 Ø	40	40	400	40	215	60	55	80
Fjord 440/40 Ø	40	40	440	43	235	60	55	83
Fjord 480/48 Ø	48	48	480	46	175	96	63	90



IF NOT MARKED OTHERWISE:
safety classification IP20 for all fittings
units in cm, kg,
If products supplied with voltage 240V upon request
illustrations and descriptions for informative purposes only

L	Length
W	Width
H	Height
Ø	Diameter
+	Chandeliers with + sign: the top of the chandelier is also covered with crystal chains
~240V	240 V
CE	Product conforms to European Community Directive
PG	Product conforms to GOST R
	Fixable to ceiling
	Fixable to wall
	Table lamp
	E14 Light bulb
G9	G9 Halogen
G4	G4 Halogen
LED	LED
	Only basic insulation, accesible conductors are earthed. Earthing: compulsory.
F	Lights are fixable to fiery surface directly

COLLECTION: Crystalight

Type: suspended chandelier
Structure: polished stainless steel
Trimmings: full-cut crystal octagons and pendants in various sizes and forms
Pinnings: nickel plated rings
Suspension: galvanized bowden - Ø 1,5 mm
Bulb: max 60 W - G9 halogen
Cable: transparent PVC+PVC - 250 cm
Ceiling Rose: polished chrome-plated steel

MODEL	DIMENSIONS cm				PACKAGE cm			
	L	W	H	kg	L	W	H	Σ kg
Fjord 520/48 Ø	48	48	520	50	188	96	63	94
Fjord 560/56 Ø	56	56	560	54	202	112	71	103
Fjord 600/56 Ø	56	56	600	58	215	112	71	107



IF NOT MARKED OTHERWISE:
safety classification IP20 for all fittings
units in cm, kg,
all products supplied with voltage 240V upon request
illustrations and descriptions for informative purposes only